Binotto Scissor Kit


Elevating trust,
inspiring passion.





Binottogroup

SINGLE OR DOUBLE ACTING POWERPACK

POWER-PACK
SINGLE ACTION FOR 3.5 TON










Motor 12V 1600W	2500 rpm
Pump displacement [cm³/rev]	2.1
Total volume [L]	4.5
Oil port [L]	3/8" BSP


DOUBLE ACTION FOR 3.5 TON

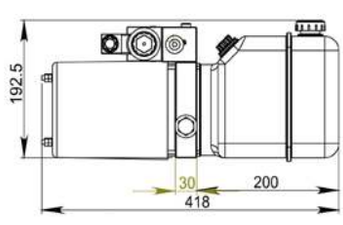






Motor 12V 1600W	2800 rpm
Pump displacement [cm³/rev]	2.1
Total volume [L]	4.5
Oil port [L]	3/8" BSP

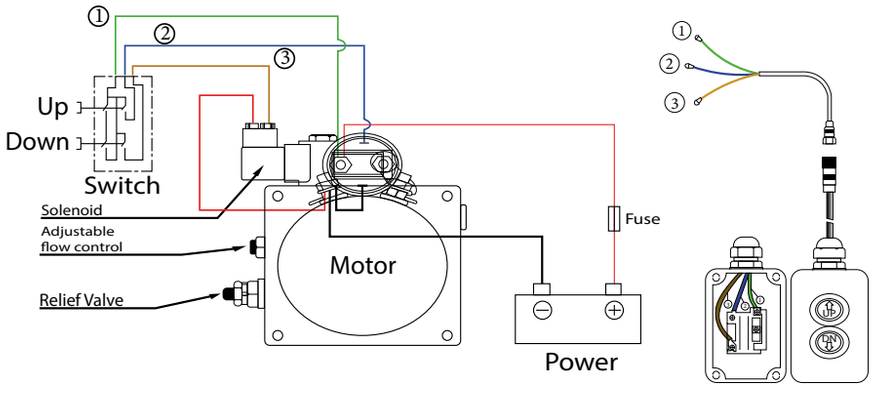

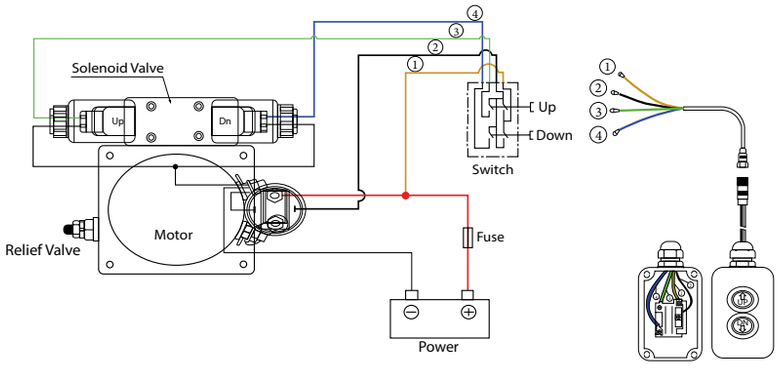


Other sizes and specifications of the oil tank are available upon request

3.5 TON refers to the vehicle's Gross Vehicle Weight (GVW).

3.5 TON BINOTTO SCISSOR KIT

MOUNTING DIMENSIONS

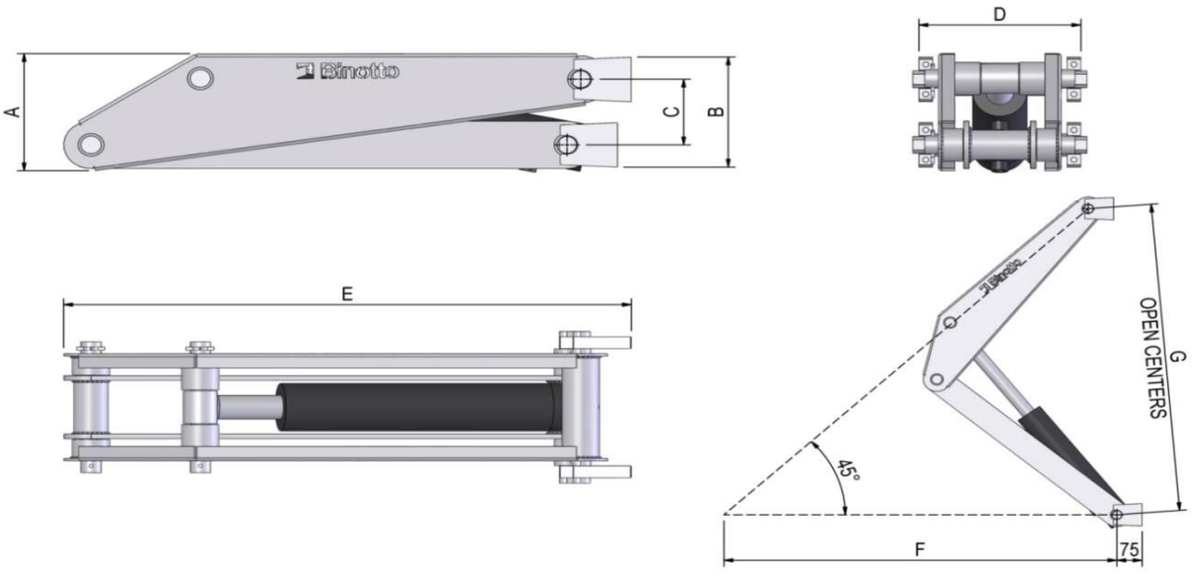

ITEM	DESCRIPTION	MAX TIP WEIGHT	A	B	C	D	E	F	G	WEIGHT	PRESSURE	MAX. PRESSURE
CNSBIAAB1BO3400001	SCISSOR GEAR 3.5T	1.5 TON	197	190	110	237	830	1150	1032	38.7 kg	160 BAR	200 BAR

PRODUCT DETAILS & BENEFITS

Hydraulic Cylinder Options:
Operates in single or double-acting configurations based on the selected Binotto powerpack.

Reduced Tipping Times:
Achieved through the fast and consistent movement of the hydraulic cylinder throughout its entire stroke.

Lightweight and Compact:
The most lightweight and compact solution of the category.

Easy and Quick Installation:
Designed for seamless integration into the chassis for easy and fast installation.

Corrosion Resistance:
Fully galvanized frame ensures optimal oxidation resistance under all working conditions.

Complete Configuration Freedom:
The kit can be installed in the optimal position according to the required tipping angles.

No Additional Components Needed:
No need for a Binotto Body-Fix installation when the selected configuration utilizes the double-acting cylinder.

3.5 TON refers to the vehicle's Gross Vehicle Weight (GVW).



Binotto Group
Via Divisione Julia 7/B
36031 Dueville
(VICENZA) ITALY

info@binotto.com
+39 0444 593290

binottogroup.com